

Speaker Line Checker FCVC2024

Overview


- It can check speaker wire open, short, and exceed value according to setting up impedance.
- It automatically checks speaker wires by program timer operations.
- The possible set-up time is between 20 minutes and 200 minutes.
- RS-232C terminal IN/OUT CONTROL with AMX/CRESTRON Interface.
- DC 24V operation.
- Keeps stored values by Non volatile memory
- Alert sounds when fault is found
- Buzzer on/off function.



Specifications


	FCVC2024
Test Impedance Range	20Ω ~ 3kΩ
Test Duration (per channel)	less than 100msec/channel
Test Interval (selectable)	20min ~ 200min
Number of Channels	24Channel
Test Frequency	15kHz
Test Voltage	AC 5V
Operating Temperature	0°C ~ +40°C
Power Source	DC 24V
Weight (SET)	5.2kg/11lb
Dimensions (SET)	482(W)X88(H)X380(D)mm/19(W)X3.5(H)X18(D)in

* Specifications and design are subject to change without notice.

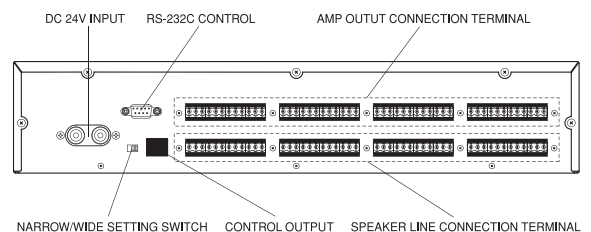

Speaker Line Checker FCVC2024

Architect's and Engineers' Specifications

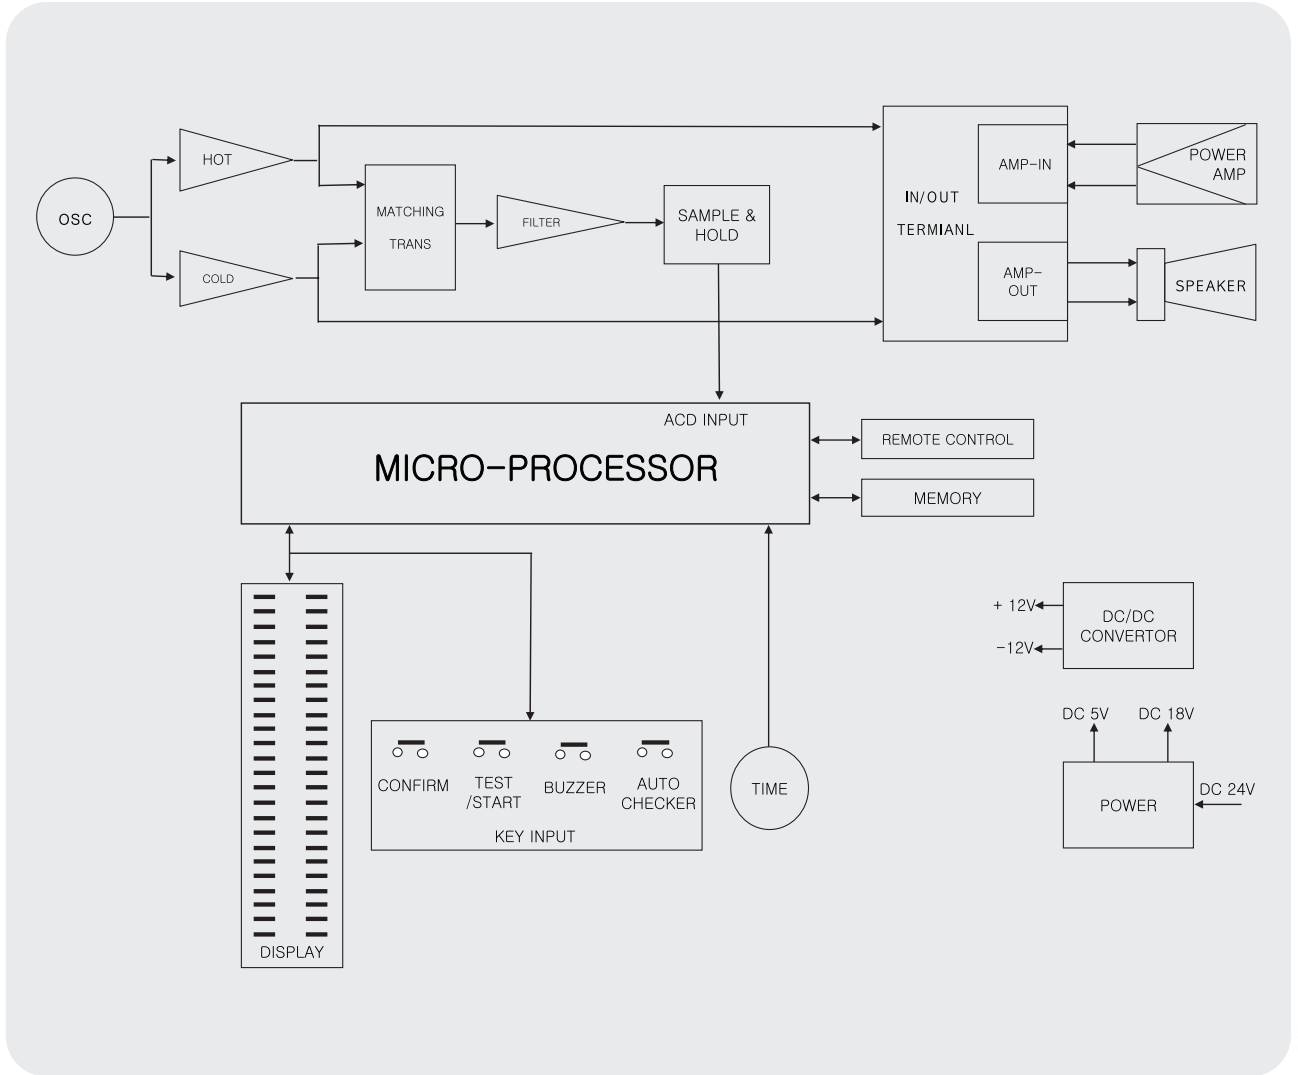

ADEVA LTD. Fire Alarm Systems

Guldeste Sok. No:24 Yakacik
Kartal / Istanbul / Turkey

Tel: +90 (0)216 5982800 Fax: +90 (0)216 5982899
Email: info@adevafire.com www.adevafire.com

Copyright © 2009 ADEVA. All rights reserved.

All technical data is correct at time of publication and is subject to change without notice. All trademarks acknowledged. Installation information: in order to ensure full functionality, refer to the installation instructions as supplied.