

Automatic Telephone Dialer Dialer

Overwiev

- · Compatible with all fire system
- · 6 different wire number
- 16 sec voice recording
- Box / Card type options
- 12/24 VDC
- · Redial function if the number is busy or not answered
- Encryption feature
- Microprocesser controlled circuit
- Analog phone line input
- Telephone line frequency 390 490Hz
- Integred electret microphone
- RoHS and ISO9001:2000 certification





Description

Automatic Telephone Dialer is designed to record audio for 16 seconds. It allows 6 telepfone numbers. It has power failure proction for records. They could be used in households, Office buildings, hotels, banks, retail stores and many more facilities.

Automatic Telephone Dialer features busy-line and no-answer detection to ensure prompt transmission of up to 2 prerecorded messages delivered sequentially to as many as 6 standard telephones, cellular phone, voice and/or numeric pagers. Messages to both local and long-distance calls can be transmitted. When activated, the dialer instantly begins calling the numbers in sequence, delivering each message 1 to 5 times in a row, in accordance with the pre-selected number of dialing attempts.


Automatic Telephone Dialer is programmable, offering customization to fulfill virtually any residential or business alerting requirement

Automatic Telephone Dialer features Versatile, full-featured, easy to program , keypad door hides keys from curious fingers, Standard RJ-11 telephone Jack with loop through , flash ram for stroring recorded voice messages and programming retains even whenn power goes out, provides reliable emergency notification 24 hours a day.





Arch itect/Eng ineer Specifications

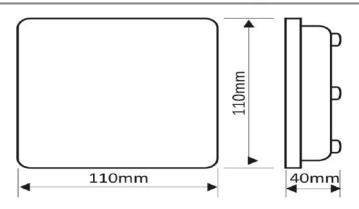

Electrical Specifications

Operating Voltage Range	24VDC
Typical Standby Current@ 25bC	50mA @ 24VDC
Maximum Alarm Current (LED On)	100mA @ 24VDC

Enviromental Specifications

Application Temperature Range	-10°C to +50°C
-------------------------------	----------------

Call Information

Called ph one nu mber	6
Call period	Tone:70sec - Pulse:80sec
Audio recording duration	16sec
Unanswered/ Busy	Call back 5 times
Unsanswered calling period	50 second
Unsanswered call number	10 times

Mechanical Information

Meterial	ABS Plastic or Card type
Colour	White
Length	40
Width	110
Height	110

ADEVA FIRE ALARM SYSTEM

ADEVA PLAZA Semah St. No:43 Serifali / Umraniye / Istanbul TURKEY Tel: +90 (0)216 5982800 Fax: +90(0)216 5982899 Email: info@adevafire.com

www.adevafire.com

